


# Double Hung Windows

- Operating unit with both sash moving up and down.
- Interlocking design of the meeting rail secures sash tightly together around weatherstripping to help prevent drafts.
- Closed-cell foam sill bulb protects against air and water infiltration at the sill.
- Easy-to-move sash remain in any open position because of a durable, constant force coil spring balance system.
- Both top and bottom sash tilt in for easy cleaning from inside the home.
- A pop-out vent latch allows the sash to partially open for ventilation.

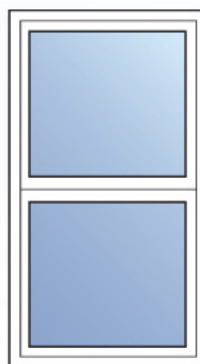

## Standard Features

Frame Type	Replacement (no nailing fin)
Exterior Frame Design	Contoured
Frame Construction	Welded
Sash Construction	Welded
Jamb Thickness	3-1/4"
Vinyl Profile	Chambered
Vinyl Color	White
Sill Design	Sloped
Spacer System	Intercept®
Insulating Glass Unit	3/4"
Glass	Low E / Argon-filled
Glass Type	Clear
Glass Strength	Single
Weatherseals	Finseal and Sill Bulb Barrier
Sash Operation	Constant Force Coil Spring Balance System
Meeting Rail	Interlocking Meeting Rail
Cam Lock	Single: Units <24" Tip-to-Tip; Double: Units ≥ 24" Tip-to-Tip
Screen	Half, Fiberglass Extruded
Lift Rail	Extruded
Vent Latch	Single

## Optional Features

Vinyl Color	Tan or Clay
Screen	Full, Fiberglass Extruded
Glass	Tempered, Tinted Bronze, Tinted Grey, Obscure
Glass Strength	Double Strength
Colonial Grids	White, Tan, Clay or Brass
Prairie Grids	White, Tan, Clay or Brass
Perimeter Grids	White, Tan, Clay or Brass
Jamb Extensions	Quick Trim (clear), Wood (primed or stainable)