


End Venting Slider

- Side units operate from side to side, while the center unit remains stationary.
- Choose from either a 1/3-1/3-1/3 or 1/4-1/2-1/4 configuration.
- Side operating units glide on corrosion-resistant brass rollers.
- Both meeting stiles feature an interlocking design to secure sash tightly together.
- Side units lift out to allow for exterior glass surface cleaning to be done from inside the home.

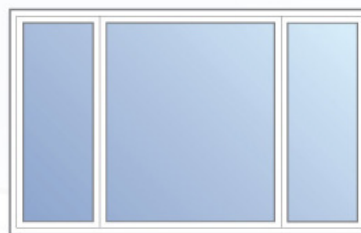

Standard Features

Frame Type	Replacement (no nailing fin)
Exterior Frame Design	Contoured
Frame Construction	Welded
Sash Construction	Welded
Jamb Thickness	3-1/4"
Vinyl Profile	Chambered
Vinyl Color	White
Spacer System	Intercept®
Insulating Glass Unit	3/4"
Glass	Low E / Argon-filled
Glass Type	Clear
Glass Strength	Single
Weatherseals	Finseal and Sill Bulb Barrier
Meeting Stile	Interlocking Meeting Stile
Sash Operation	Brass Rollers
Cam Lock	Dual
Screen	Two Half Screens, Fiberglass Extruded
Lift Rail	Extruded

Optional Features

Vinyl Color	Tan or Clay
Glass	Tempered, Tinted Bronze, Tinted Grey, Obscure
Colonial Grids	White, Tan, Clay or Brass
Prairie Grids	White, Tan, Clay or Brass
Perimeter Grids	White, Tan, Clay or Brass
Jamb Extensions	Quick Trim (clear), Wood (primed or stainable)